

NEONYX

NEONYX is an aesthetic and robust lectern, available in different configurations :

NEONYX TOUCH with a 19,5" touch screen.

NEONYX LIFT with height adjustment system.

NEONYX TOUCH LIFT combines NEONYX TOUCH and LIFT.



NEONYX STANDARD

Ref.
NEONYX_M



NEONYX TOUCH

Ref.
NEONYX_TOUCH



NEONYX LIFT


Ref.
NEONYX_LIFT



NEONYX TOUCH LIFT

Ref.
NEONYX_TOUCH_LIFT



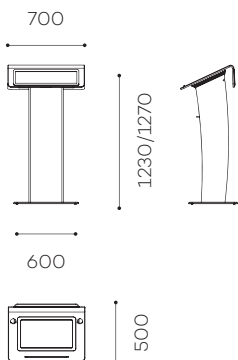

SPECIFICATIONS

MATERIAL

White satin and mat black plexiglass

LECTERN HEIGHT

NEONYX M and TOUCH : 1230 mm
 NEONYX LIFT and TOUCH LIFT : 1270 mm

TOP OF LECTERN DIMENSIONS (W X D)

700 x 500 mm

WEIGHT

NEONYX M : 25 kg
 NEONYX TOUCH : 28 kg
 NEONYX LIFT : 37 kg
 NEONYX TOUCH LIFT : 40kg

INCLUDED

- Two microphone base locations (Sennheiser MZS31)
- Strip with magnetic plate for logo inlay
- Power cable (except NEONYX M)

In addition for TOUCH and TOUCH LIFT :

- Connection panel including : RJ45, DVI, HDMI and USB
- 19,5" Elo Touch 2094L touch screen

DELIVERY

Assembled in a wooden box

Tech : Elo Touch 19,5" 2094L

OPTIONS

- Anti-vibration microphone base
Ref : Sennheiser MZS31
- Fixed shelf on the side of the lectern
Ref : Shelf_Neonyx
- Casters and skirt to cover up
Ref : Neonyx_SkirtWheels
- Printed or adhesive logo
Ref : Neonyx / Logo
- Other finish
Ref : upon request



Example of location for connection panel



Customisable and magnetic plate for logo